




VINYL LINER 1.90" ANCHOR

INSTALLATION HELP GUIDE

FOR USE WITH ALL S.R.SMITH 16" AND 30" TABLES AND 16" SEATS ON VINYL LINER POOLS ONLY.

TO AVOID ENTRAPMENT DO NOT INSTALL NEAR WALLS OR OTHER OBJECTS WHERE THERE WILL NOT BE SUFFICIENT CLEARANCE WHEN USED WITH A 16" OR 30" DIAMETER TABLE OR SEAT.

MINIMUM CONCRETE POUR DIMENSIONS

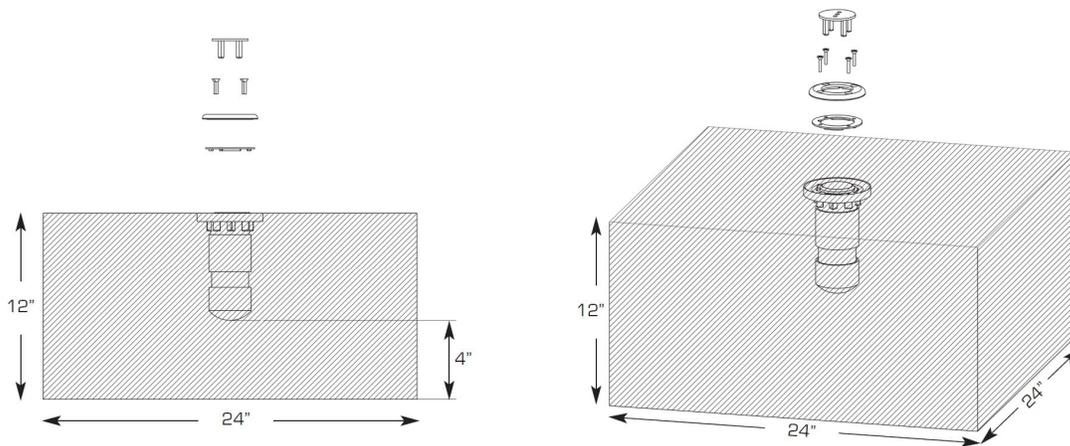

INSTRUCTIONS:

CHECK YOUR LOCAL ELECTRICAL CODE FOR BONDING REQUIREMENTS.

- 1 - Locate suitable location for anchor installation. Allow sufficient clearance for use of either the 16" or 30" diameter tables and seats.
- 2 - Anchor must be set in concrete in a minimum size pour of 24" L x 24" W x 12" D, allowing a minimum thickness below anchor of 4".
- 3 - Make sure the anchor is level and the top of the body is flush with the top of the concrete.
(insure no concrete gets into the body during pour)
- 4 - When concrete is cured, install gasket, liner and faceplate per manufacturer's specifications.
- 5 - Use included cap when anchor is not being used.

NOTE: Install black plastic cap on anchor end of support pole to prevent damage to pool vinyl liner.



WARNING

IMPORTANT INSTALLATION INFORMATION

The installation of this product should be done only by a licensed and professional installer. Installation should be done strictly in conformance with all local building codes, electrical codes and other building and safety laws and regulations. Among other things, that your installer should carefully analyze the need to bond the product to prevent an electrical hazard. Failure to properly install this product could result in a dangerous condition, including but not limited to electrical or structural hazards. S.R.Smith disclaims all liability arising from the installation and the user assumes all risk associated with the installation.

S.R.Smith, LLC
800.824.4387
srsmith.com

Copyright © 2019 S.R.Smith, LLC All rights reserved.



WARNING

INTENDED USE INSTRUCTIONS



FIGURE 1: Pool/Spa Table Parts: Support Pole, 6''/145.7 Bronze Anchor, 30''/76.2cm Table Top, Pole Receiver, Clear Umbrella Stand Cap, & Umbrella Support Pin (NOT SHOWN: optional 18''/45.7cm support pole; optional vinyl liner pool anchor)

ASSEMBLY AND INSTALLATION INSTRUCTIONS FOR POOL/SPA TABLE:

1. Identify all Pool/Spa Table components. See **FIGURE 1**. (Please see page 3 for Pool/Spa Seat installation.)
2. Locate a proper installation location within the pool or spa.
3. Install the 6''/15.2cm bronze anchor socket or vinyl liner pool anchor (if supplied) in the pool or spa floor. Make sure the anchor is plumb. **CHECK YOUR LOCAL ELECTRICAL CODE FOR BONDING REQUIREMENTS.**
4. Table support pole comes 54''/137.2cm in length. This allows for a maximum table height of 48''/122cm from the bottom floor of a pool or spa. (6''/15.2cm of the post sits in the bronze anchor socket) Tanning ledge support post in 18''/45.7cm also available (12''/30.5cm table height).

5. The support pole has a pass through hole 30"/76.2cm from the top of the pole, or 24"/61 cm from the bottom of the pole. This allows a stop point when using an umbrella. The 30"/76.2cm end points upward during assembly. If cutting pole, cut from the end that is 24"/61 cm from the pass through hole. (No pass through hole for 18"/45.7cm support pole.)
6. If a shorter table height is desired, determine height required and add 6"/15.2cm for the bronze anchor socket. Cut the support pole with a hacksaw. (Example: a 30"/76.2cm table height would require a 36"/91.4cm support pole)
7. Deburr and clean the cut end of support pole (if cutting).
8. Remove the bronze anchor cover plate and place the cut end of the support pole fully into the anchor socket.
9. Locate the support pole receiver. **NOTE: white internal ring end gets glued into table flange. SEE FIGURE 2.**
10. Place the support pole receiver on top of the support pole. **NOTE: the support pole will help facilitate the gluing of the support pole receiver into the table flange. SEE FIGURE 3.**
11. Lay the table upside down on the cardboard box to prevent scratching. Use PVC glue to permanently attach the support pole receiver to the table flange. Support pole should still be inside receiver. Use the support pole to fully seat the receiver into the flange. **SEE FIGURE 4 AND FIGURE 5.**
12. When the receiver is fully inside the flange, the support pole can then be removed. **SEE FIGURE 6.**
13. An umbrella (not included) may be used by removing the clear cap from the table grommet. (Maximum umbrella pole size is 1-5/8" or 1.625"/4.1cm).
14. When removing the table be sure to insert the bronze anchor cover plate.



FIGURE 2: POLE RECEIVER

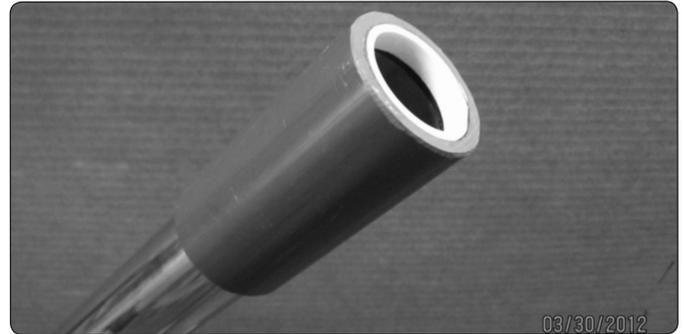


FIGURE 3: POLE RECEIVER ON SUPPORT POLE



FIGURE 4: POLE RECEIVER SHOWN WITH TABLE FLANGE



FIGURE 5: POLE RECEIVER ATTACHED TO TABLE FLANGE

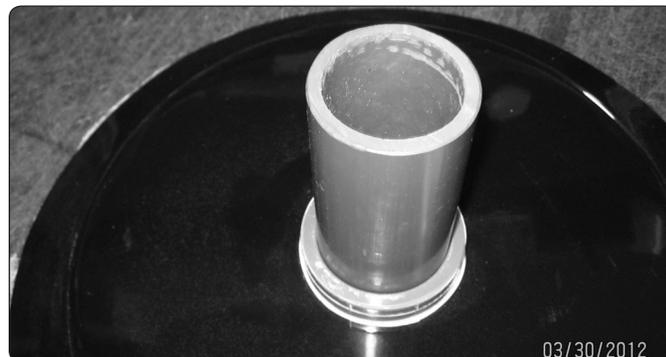


FIGURE 6: PROPERLY GLUED POLE RECEIVER SHOWN

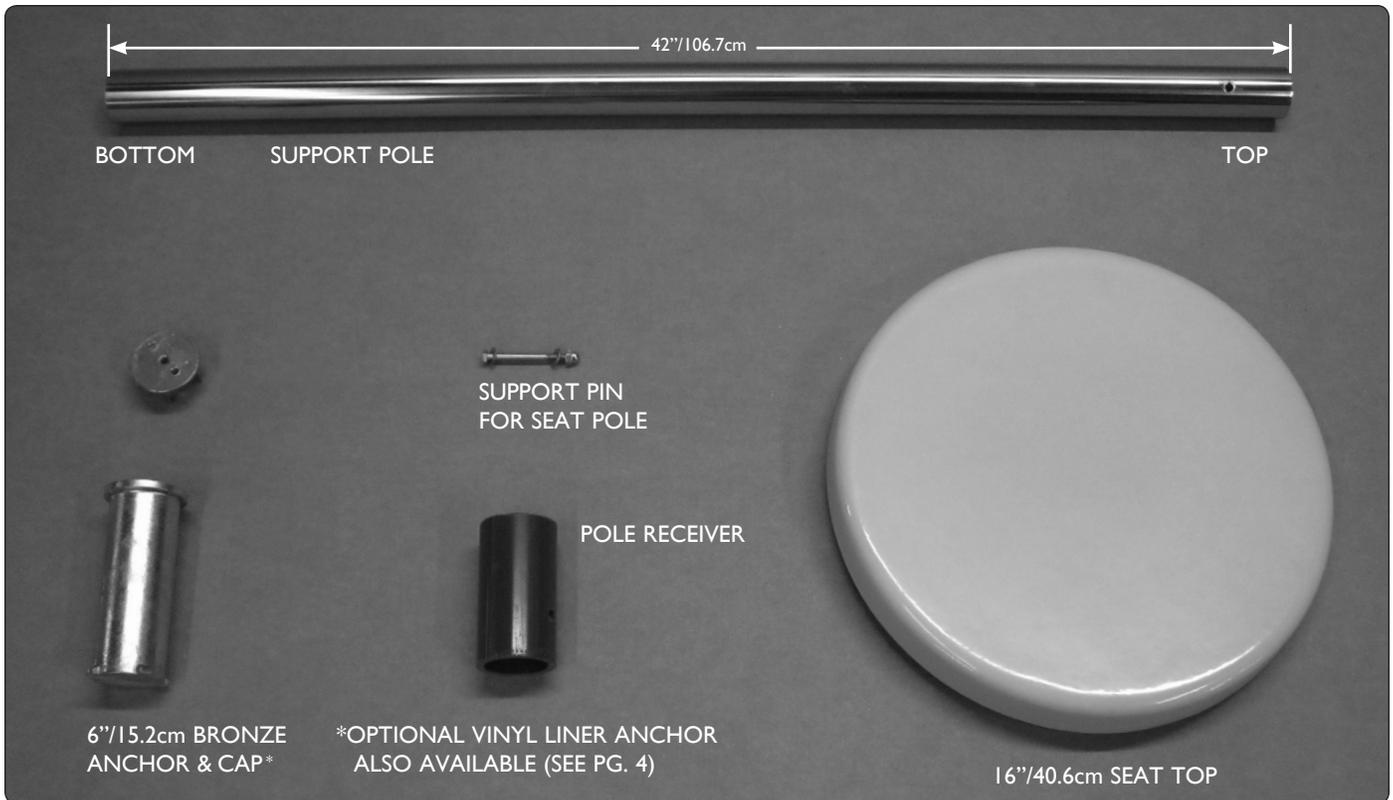


FIGURE 7: Pool/Spa Seat Parts: Support Pole, 6”/15.2cm Bronze Anchor, 16”/40.6 Seat Top, Pole Receiver, and Seat Pole Support Pin (NOT SHOWN: optional vinyl liner pool anchor)

ASSEMBLY AND INSTALLATION INSTRUCTIONS FOR POOL/SPA SEAT:

1. Identify all Pool/Spa Seat components. **SEE FIGURE 7.** (Please see page 1 for Pool/Spa Table installation.)
2. Locate a proper installation location within the pool or spa. **NOTE: When installing with a Pool/Spa Table, See Figure 8 for suggested placement.**

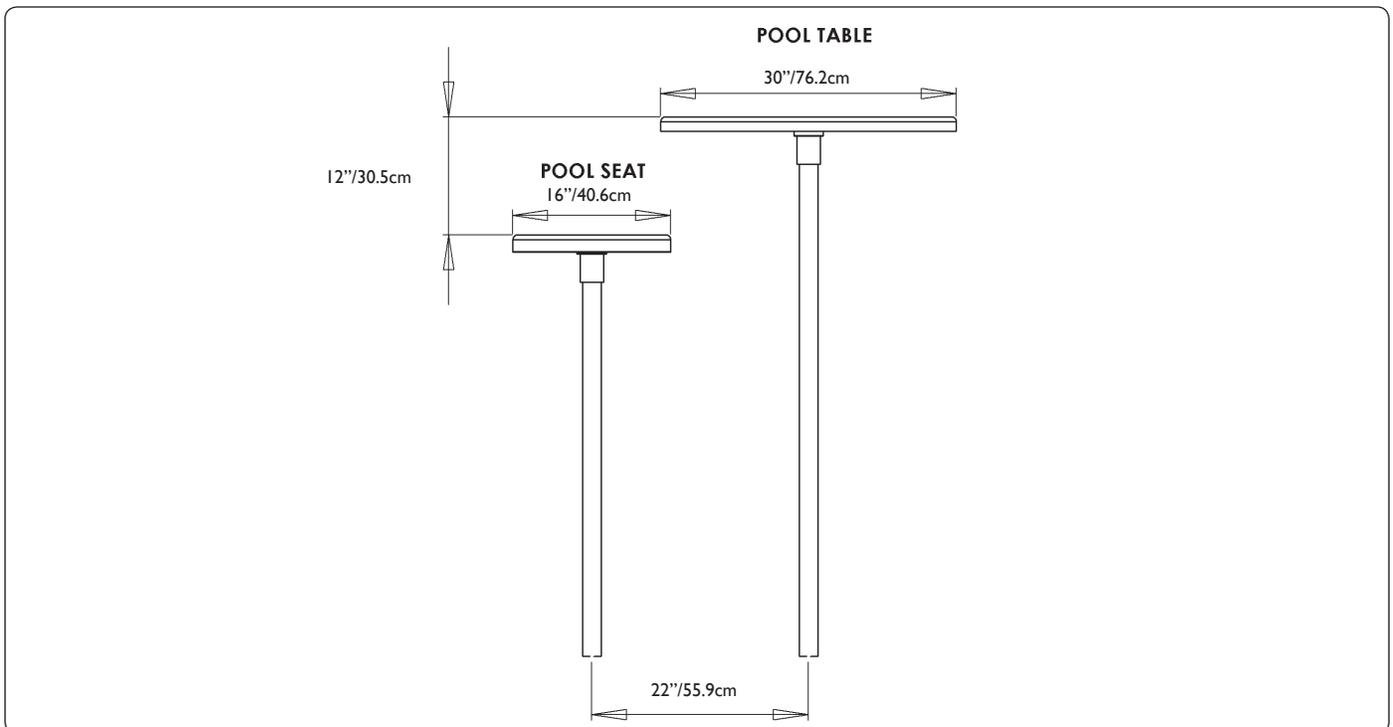


Figure 8: Pool/Spa Table & Seat Recommended Placement Diagram

ASSEMBLY AND INSTALLATION INSTRUCTIONS FOR POOL/SPA SEAT: Cont.

3. Install the 6"/15.2cm bronze anchor socket in the pool or spa floor. Make sure the anchor is plumb. **CHECK YOUR LOCAL ELECTRICAL CODE FOR BONDING REQUIREMENTS.**
4. Table support pole comes 42"/106.7cm in length. This allows for a maximum seat height of 36"/91.4cm from the bottom floor of a pool or spa. (6"/15.2cm of the pole sits in the bronze anchor socket)
5. If a shorter seat height is desired, determine height required and add 6" for the bronze anchor socket. Cut pole with a hacksaw. (Example: A 24"/61 cm seat height would require a 30"/76.2cm support pole.) **NOTE: Top of seat support pole has hole drilled to attach the pole receiver. If cutting is required, cut pole on end without hole.**
6. Deburr and clean the cut end of support pole (if cutting).
7. Bolt post receiver to support pole and tighten. **SEE FIGURE 9.**
8. Lay the seat upside down on the cardboard box to prevent scratching. Use PVC glue to permanently attach the support pole receiver to the seat flange. Support pole should still be inside receiver. Use the support pole to fully seat the receiver into the flange. **SEE FIGURE 10.**
9. When removing the seat be sure to insert the bronze anchor cover plate.

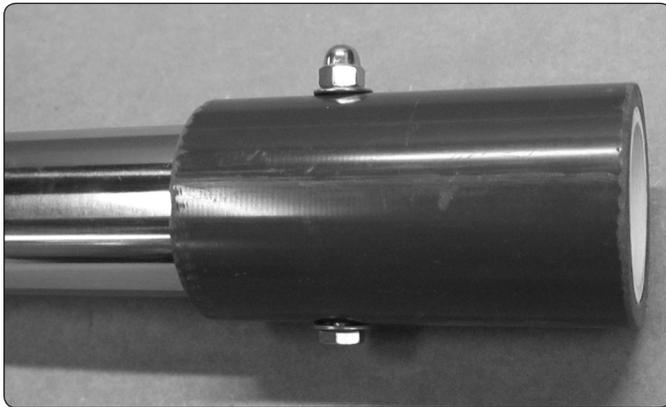


FIGURE 9: POOL/SPA SEAT RECEIVER POLE



FIGURE 10: POOL/SPA SEAT RECEIVER POLE SEATED INTO POOL/SPA SEAT

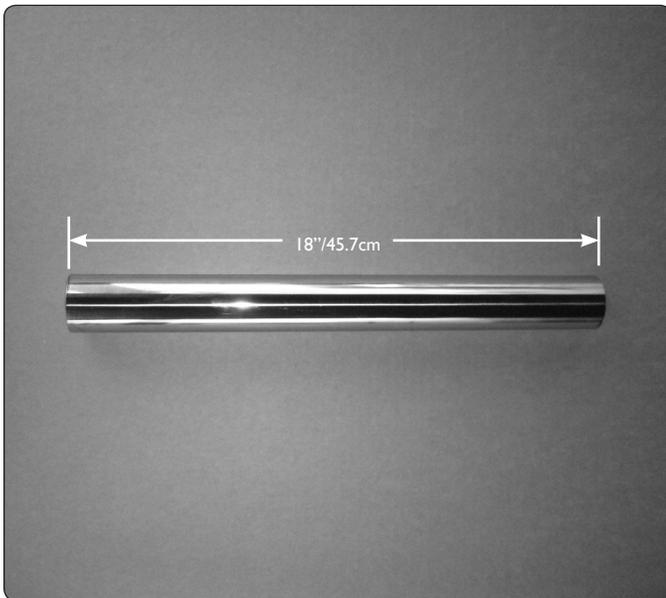


FIGURE 11: 18"/45.7cm SUPPORT POLE IMAGE



FIGURE 12: OPTIONAL VINYL LINER ANCHOR

FOR WARRANTY INFORMATION VISIT
SRSMITH.COM/WARRANTY