

Retro Fit Platform Installation


1. Remove existing platform top

*Due to the pool environment you may need to spray the existing hardware with a spray lubricant (Inox, WD-40 etc.)



2. Align new retro fit platform

*Ensure new platform is central to base (side to side)
*Using a straight edge, align edge of platform with the backstroke handle & pool wall. Check both sides of platform edge.

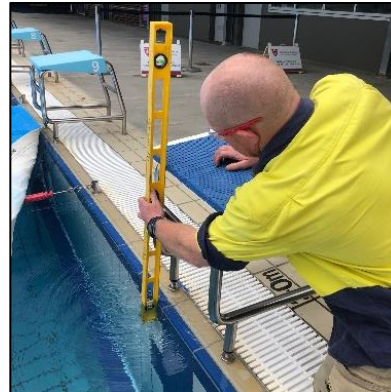

3. Clamp platform to base

*Use quickgrips or similar clamps
*Double check alignment of platform and realign if necessary.



4. Mark holes for hardware

* Using a fine point permanent marker, from underneath mark the platform through the holes.



1. Drill holes in underside of platform

*Remove platform from the base & place on a flat surface.

*Center punch the holes in preparation for pilot hole.

*Using a 5mm drill bit, drill pilot holes from bottom of the new platform.



2. Drill holes in topside of platform

*Using an 11mm drill bit, drill holes from the topside of the platform

*Using a countersink bit, counter sink the platform of the block to receive the bolts.



3. Position new platform onto base

*Place platform onto base & insert countersunk bolts through the holes.

*Apply antisieze to bolt threads. (if spray lubricant was needed to remove old hardware, this can be used as an antisieze).



4. Attach new platform to base

*Apply antisieze to bolt threads. (if spray lubricant was needed to remove old hardware, this can be used as an antisieze).

*Ensure edge of top is aligned with backstroke handle & wall and secure with the washers and nuts provided.



5. Attach Track start to platform

*Using a 6mm allen key, screw in the front bolt on one side of the trackstart.

*Insert bolt that is screwed in into the slide slot in the trackstart guide.

*Fit other side of trackstart over block top, align front bolt with slide slot and screw in bolt.



The new Retrofit platform is now ready for use:

